

Hoop one layer of regular weight bonded quilt batting and one layer of flannel – flannel on top.

Stitching out body parts 1 & 2

Stitch out the inside of ear with pink thread

take hoop off machine and lay one layer of flannel on top of hoop and one layer of batting on top of flannel – omitting area of ear – Put frame back on machine – change thread to color of fabric and stitch out around the ear, arm, foot and tail(on 1)



Remove from machine, cut out the body part pieces and turn


Hoop one layer of batting with one layer of flannel on top – assemble back – lay tail over the bottom basting stitch and stitch in place. Tack the top part of the tail onto the body if desired with tacking stitch. This can be omitted if wished. Remove from hoop – do not cut. * There is a top basting line to mark top of body. On the photo below the tail is not tacked down.



Hoop one layer batting with one layer of flannel on top – assemble front –When stitching the back and front, the colors change when a body part needs to be put down to make the machine stop. The front will baste, then stitch the eyes in black, the nose in pick. Then take the hoop off and put ears and arms in place. Center ears at top of head, lay arms about 2 stitches down from neck. Hold parts about ½ inch outside of basting line . Use thin strips of painters tape to hold parts in place white stitching. The machine will stitch the ears and stop telling you to change color. Then will stitch the left arm, stop and tell you to change color. Then stitch the right arm, stop and tell you to change color. This is done to allow time to make sure everything is staying in place. You do not need to change color, I stitch these in the color of the fabric.

Leave the ears and arms taped as pictured below.

* I tape the ears so that they will stitch on with outsides bend in to center.

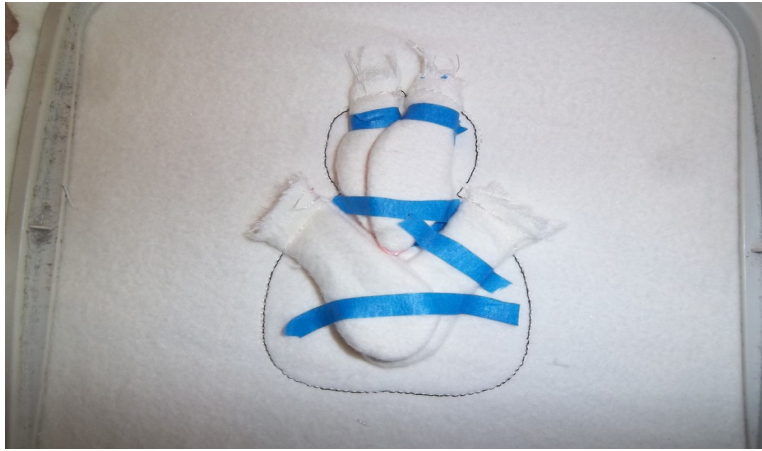

Tape legs in place centering on bottom of body and stitch in place. Take hoop off machine, leaving front hooped. Untape the legs so they lay beyond the bottom of the body, take them to hoop. Lay the back piece down so right sides touch. Line up the bottom and top stitching - pin outside the stitching area. Put hoop back on machine and stitch around body. The legs will stick out the opening.



Remove from hoop, trim about $\frac{1}{4}$ inch around body, making small clip near neck. Turn. Remove paiters tape. I put 2 extra layers of batting inside the body to give more thickness, Stitch the opening closed.

To make a stuffed bunny – omit the batting. After turning the arms, legs and tail lightly stuff them. If they are over stuffed they will not stitch down properly. I also do not tack the tail down with the machine to avoid breaking needles.