

ITH EMOJI VARIETY SET-2 (4x4, 5x7 & 8x8)



FOR THE ZIPPERED BAGS-

First hooping we need to get the back ready.

Second hooping will be the front and final assembling of the bag.

1. Hoop Tearaway stabilizer and sew the 1st outline of the back design.
2. Lay a piece of felt, fleece or fabric, sew the 2nd color. (the fabric should be at least 1/2" excess from all around)
3. Sew the 3rd color which will give placement lines for the eyebrows, eyes and mouth.
4. Lay the applique fabric for the eye brows and sew the 4th color.

5. Lay the applique fabric for the eyes, sew the 5th color and finally lay the fabric for the mouth and sew the 6th color.
NOTE- Color stops are only to make the machine stop, just use a matching thread color for all the above steps.
6. Remove hoop and trim the excess fabric from the eye brows, eyes and mouth. (It is recommended to trim as you go after each color stop)
7. Next will be the satin stitching of the eye brows, eyes and the mouth.
8. Remove hoop and lay the lining at the back of the hoop, tape in place and sew the last color. (this layer is optional you may add only if extra thickness is needed)



9. Remove, un-hoop and trim leaving ½" all around.

10. Keep aside till needed.
11. Hoop Tearaway stabilizer once again and load the design of the zippered side of the bag.
12. Sew the 1st color which is the placement line for the zipper and the outline.
13. Place the zipper exactly between the placement lines and tape in place.
14. Sew the next color, tack down stitch for the zipper.
15. Use 2 pieces of fabric folded in half, exceeding the outline at least ½". With the folded edge next to the teeth of the zipper.
NOTE- If your material is very thick to use double layered, then simply use one layer with a folded 1" edge and lay this right next to the zipper teeth)
16. Tape in place or gently hold in place. 1st the upper piece will stitch, next the lower piece.



17. Change thread color for the next decorative stitching.
18. OPEN THE ZIPPER MORE THAN HALF WAY.
19. Lay any belts or loops you wish to add and tape in place.



20. Lay the prepared back piece with right side down, matching the outlines.
21. Sew the next color which will join the front and back together.



22. Remove hoop and lay the lining at the back of the hoop right side facing down (towards the hoop) and tape in place.
23. Sew the last partial outline.
24. Remove, un-hoop and trim the whole bag leaving $\frac{1}{4}$ inch seam all around.
25. Turn the bag through the opening.
26. Hand sew and close the opening in the lining.
27. Open the zipper and turn the bag inside out.

FOR THE COASTER-



REPEAT SAME PROCESS FROM STEP 1-7....

11. Remove hoop and lay a piece of felt, vinyl or craft foam at the back. Tape in place and sew the last outline, it is recommended to have matching thread in needle and bobbin.

12. Unhoop and trim around the coasters leaving 3-4 mm seam all around.

FOR THE STUFFIES-



Follow same process from step 1-7....

11. Once the emoji face is complete, lay the backing fabric right side facing down over the hoop.

12. Sew the last partial outline.

13. Remove, un-hoop and trim leaving $\frac{1}{4}$ " seam. (leave $\frac{1}{2}$ " at the opening)

14. Turn it inside out through the opening, stuff and stitch to close the opening.

FOR THE NO ZIPPER BAG-



FRONT



BACK


1st hooping we need to get the back ready.

1. Hoop Tearaway stabilizer and sew the placement line.
2. Lay a piece of non-fraying material and sew the next tack down stitch.
3. Next will be the decorative stitching.

4. Remove hoop and lay another layer of non-fraying material for lining, at the back of the hoop and tape it in place.
5. Sew the last outline. Unhoop and trim leaving ½” seam and keep aside till needed.
2nd hooping will be the front and assembling of the bag.
6. Hoop Tearaway stabilizer and sew the placement line.
7. Lay a non-fraying material and sew the next tack down stitch.
8. Continue the applique of the emoji face as explained above, from step 2-7....

NOTE: If you wish to add any belts or loops, lay them in place now and tape them. They should be sandwiched between the 2 layers of the front piece.

9. Remove hoop and lay a piece of non-fraying material at the back of the hoop and tape it in place.
10. Sew the second last color, that is the tack down outline.
11. Remove hoop and lay the prepared back piece, at the back of the hoop matching the outlines and tape it in place.

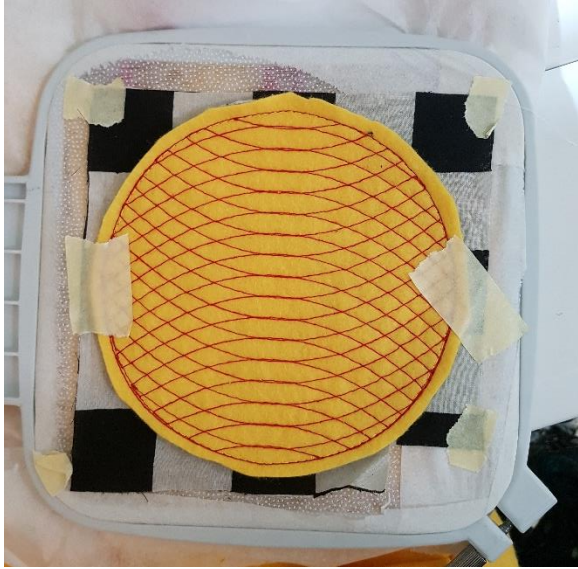

12. Sew the last partial outline.
13. Remove, un-hoop and trim all around leaving ¼" seam.
14. Add Velcro, button & loop, magnetic snaps, plastic snaps etc....