

## ITH FELT/FLEECE/FABRIC SLIPPERS FOR 'HIM' (Small, medium & large)



### **Supplies:**

**Fleece or Fabric (preferably something thick and which doesn't fray easily)**

**Craft foam**

**Threads**

**Tearaway stabilizer**

**Note:** I used a single color thread from start to finish, filling the same in the bobbin too. Either use a matching color or contrast.


If using fabric to make the slippers, you can use felt or fleece for the backing.

I used regular craft foam, not so thin that it is floppy. Its thick enough but still machine friendly.

Anti-slip fabric may be used too in place of foam, but it may not be stiff enough.

The 3 sizes provided sizes are small, medium and large. These fit perfectly for my 8 year old, myself and my hubby.

1. First hooping for the flap. Hoop Tearaway stabilizer and sew the 1<sup>st</sup> color which is the outline or placement line.
2. Lay a piece of felt covering the outline and extending at least a 1/4 inch from all side.
3. Sew the 2<sup>nd</sup> color which will tack down the piece.

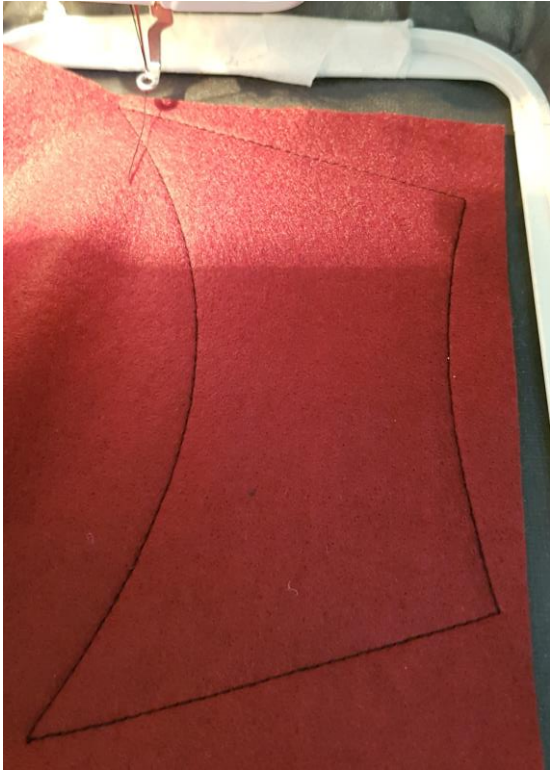

4. Next will be the decorative stitching.



5. Remove hoop from machine and lay another piece of felt at the back of the hoop, covering the outline (extending  $\frac{1}{4}$  inch from all sides again) and tape it place.



- 6.** Next color will join the backing.
- 7.** Remove hoop and trim the top and bottom edges of both the front and back piece, as closely as possible.



**8.** Next will be the satin stitches of these 2 edges. (use same thread in the bobbin as the top thread)



9. Complete 2 pieces in the same way, 1 for each slipper. Unhoop and Tearaway excess stabilizer and trim the 2 side edges leaving  $\frac{1}{4}$  inch seam.



10. 2<sup>nd</sup> hooping for the base of the slipper. You need 1 of each, base A and base B for left and right foot.
11. Hoop Tearaway stabilizer and sew the 1<sup>st</sup> color which is the outline or the placement line.



12. Lay piece of felt covering the outline and extending a  $\frac{1}{4}$  inch from all sides.
13. Next color will tack down the piece.
14. Next will be the decorative stitching as well as the guidelines for the flap placement.





15. Remove hoop from machine and lay a piece of foam at the back of the hoop, covering the outline and tape it place.



- 16.** Next color will join the 2 layers.
- 17.** Unhoop and remove the base tearing away the excess stabilizer. Trim around the whole outline carefully and make sure not to cut any stitches.
- 18.** Using a sewing machine place the top edge of the flap slightly above the top guideline and sew in place. Repeat the same on the other side.
- 19.** Trim any excess of uneven layers for a clean finish.

